




AUTHORIZED DISTRIBUTOR

Wednesday, June 10, 2020

DATA SHEET - HOLLOW SHAFT RESOLVER

PN	2367254-1			
Description:	V23401-	T2715-B101		
Size	21			
Shaft inner diameter [mm]	12.7			
Speed (pair of poles) [p]	2			
Number of poles	4			
Application Specification				
Test protocol	Results saved to manufacturing site archives. Available by request			
<b>Electrical parameters (22°C)</b>				
Input voltage [V]	7	Based on specified Input voltage and Frequency	Input resistance R1R2 [Ω]	35
Frequency Typical [kHz]	10		R1R2 tolerance [%]	± 3.5
Input current max [mA]	65		Output resistance S1S3 or S2S4 [Ω]	32
Transformation ratio (rT)	0.5		S1S3 or S2S4 tolerance [%]	± 3.2
Transf. ratio tolerance [%]	± 10			
Phase shift min [°]	-5			
Phase shift max [°]	5			
Electrical Angular Error max [°]	± 10			
Residual voltage max [mV]	25			
High Voltage test	Voltage: 500V <sub>AC</sub> (A)		Measured between: A: Winding R1-R2 and housing Winding S1-S3 and housing Winding S2-S4 and housing	
	250V <sub>AC</sub> (B)			
	Time: 1s			
Isolation test	Voltage: 500V <sub>DC</sub> (A, B)		B: Windings S1-S3 and S2-S4	
	Criterion:	R <sub>isol.</sub> > 50MΩ		
"Zero" setting:	Electrical "0" is when Coils V <sub>S2-S4</sub> = 0 and V <sub>S1-S3</sub> are in phase with V <sub>R1-R2</sub>			
Transfer function	Looking at Transformation part and turning Rotor clockwise			
	$V_{S1-S3} = +rT * V_{R1-R2} * \cos(p*\alpha)$			
	$V_{S2-S4} = +rT * V_{R1-R2} * \sin(p*\alpha)$			
Rotor Inertia	approx. 20g.cm <sup>2</sup>			
Max. Rotational Speed	20,000 rpm			
Shock resistance (11ms sine)	1000 m/s <sup>2</sup>			
Vibration	200 m/s <sup>2</sup>			
Operating temp.	-55°C...+150°C			

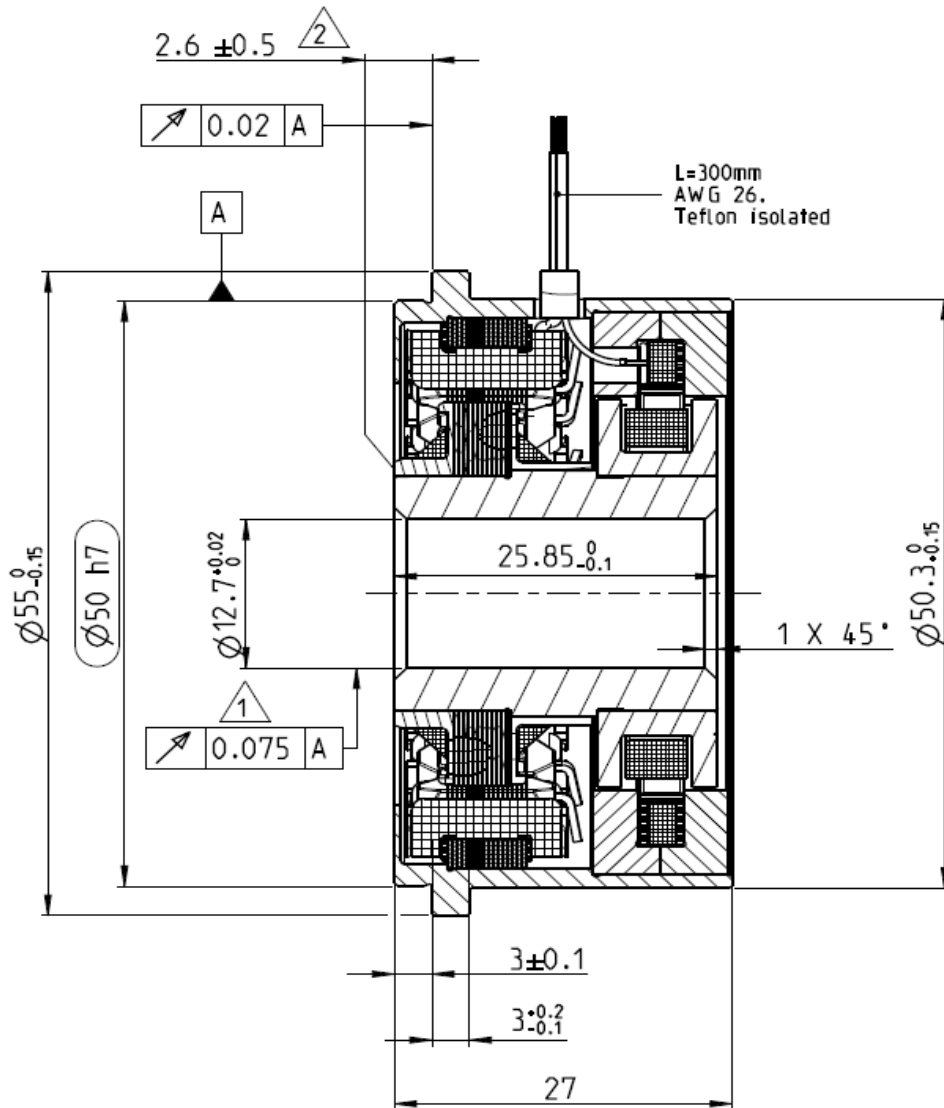

- △ 1 Gesamtschlag im eingebauten Zustand  
Concentricity in installed situation
- △ 2 Axialversatz  
Axial displacement/offset

DATE	PN. REV.	DWN	APP	DS. REV.
10-06-20	1	H.Bernardo	D.Ondrej	1